

Specifications


MODEL		GS™-3384 RT	
MEASUREMENTS		Metric	US
Working height maximum*		12.10 m	39 ft
A Platform height maximum		10.10 m	33 ft
B Platform length - standard		3.89 m	12 ft 8 in
outside extended - single deck		5.34 m	17 ft 6.25 in
outside extended - dual deck		6.57 m	21 ft 6.5 in
outside extended - super deck		7.38 m	24 ft 2.5 in
C Slide-out platform extension deck - front		1.52 m	5 ft
D Slide-out platform extension deck - rear		1.22 m	4 ft
E Platform width - outside		1.83 m	6 ft
Platform height - stowed**		1.55 m	5 ft 1 in
F Height - stowed: folding guardrails rails lowered		2.68 m	8 ft 9.5 in
		2 m	6 ft 6.75 in
G Length - stowed: single deck		3.94 m	12 ft 11.25 in
dual deck		3.98 m	13 ft 5 in
with outriggers		4.88 m	16 ft
H Width		2.13 m	7 ft
I Wheelbase		2.84 m	9 ft 4 in
J Ground clearance - centre		33 cm	13 in

PRODUCTIVITY			
Max platform occupancy		7	7
Lift capacity		1,134 kg	2,500 lbs
Drive speed - stowed		6.4 km/h	4.0 mph
Drive speed - raised		1.1 km/h	0.7 mph
Gradeability - stowed***		50%	50%
Maximum outrigger levelling****: front to back		7°	7°
side to side		12°	12°
Turning radius - inside		3.09 m	10 ft 1.5 in
Turning radius - outside		5.94 m	19 ft 6 in
Raise/lower speed		45/29 sec	45/29 sec
Controls		proportional	proportional
Drive		four wheel	four wheel
Tyres - foam-filled rough terrain		25 x 79 cm	10 x 31 in

POWER			
Power source		Deutz diesel D2011L03i 49 hp (36 kW), air cooled Ford DSG-423 75 hp petrol/LPG (56 kW) air cooled	
Auxiliary power unit		12 V DC	12 V DC
Fuel tank capacity		113.6 L	30 gal
Hydraulic system capacity		113.6 L	30 gal

WEIGHT*****			
Unit weight modifiers for options		5,465 kg	12,048 lbs
Outriggers	add	760 kg	1,676 lbs
Dual extension decks	add	165 kg	364 lbs
Super deck	add	220 kg	485 lbs
Generator/Inverter	add	48 kg	105 lbs
Non-marking tyres	add	432 kg	952 lbs

CE EN280, PB-10-611-03

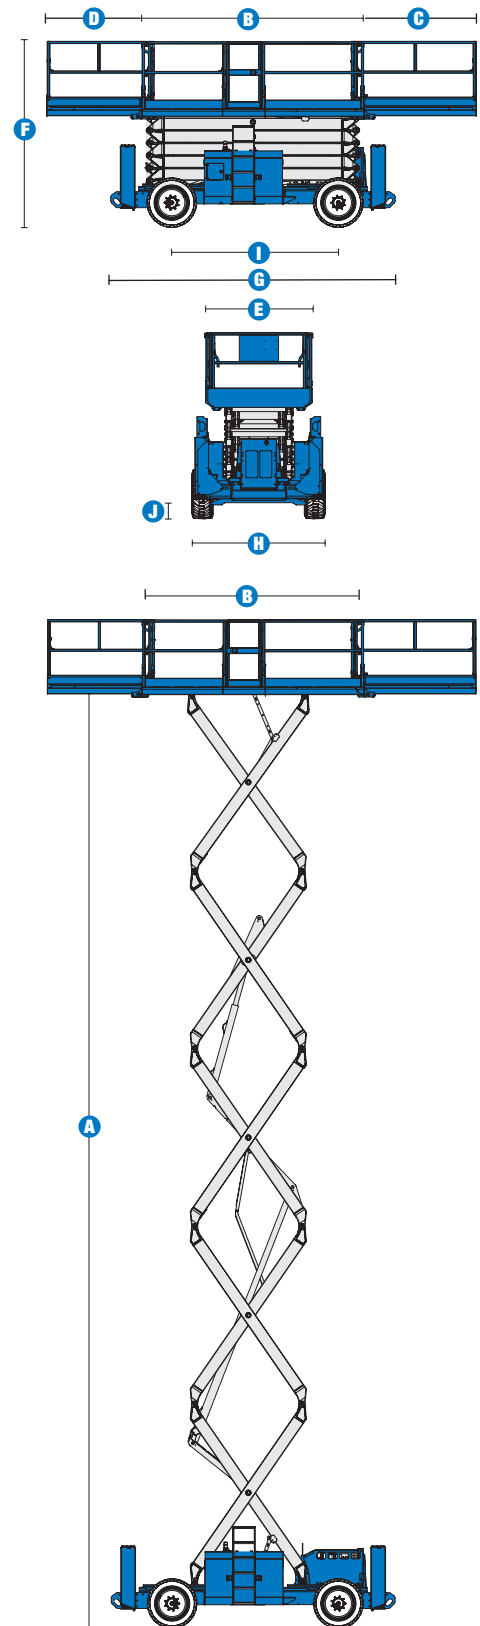

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Based on RT tyres. Deduct 2 in (5.8 cm) and non-marking.
 *** Gradeability applies to driving on slopes. See Operator's Manual for details regarding slope ratings.
 **** Outriggers are optional
 ***** Weight will vary depending on options and/or country standards.

Features

STANDARD FEATURES

MEASUREMENTS

- 12.06 m (39 ft) working height
- Up to 1,134 kg (2,500 lb) lift capacity

PRODUCTIVITY

- 3.94 x 1.83 m (156.5 in x 72 in) steel frame platform
- 1.52 m (60 in) extension deck
- Replaceable aluminium deck
- Folding guardrails
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Full-height swing gate
- Two self-closing gates
- 4x4
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Foam-filled rough terrain tyres
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Hour meter
- Certified load sensor

POWER

- Deutz diesel 49 hp (36 kW)
- Hydraulic oil cooler



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Dual slide-out platform extension deck package 1.52 m (5 ft) front and 1.22 m (4 ft) rear
- 7.30 m (24 ft 2.5 in) super deck extension package
- Automatic levelling hydraulic outriggers
- Air line to platform
- Non-marking foam filled tyres
- Dual flashing beacons
- Motion alarm
- Platform work lights

POWER

- Ford petrol/LPG 75 hp (56 kW)
- 2000 watt generator (110V/60Hz)
- Deutz diesel 49 hp (36 kW)
- Cold start packages for all engines (not CE)
- Diesel scrubber/spark arrestor
- Diesel spark arrestor (without scrubber)
- LPG steel tank only, 15 kg (33.5 lb) capacity

UK

The Maltings
Wharf Road
Grantham NG31 6BH
UK
Tel: +44 (0)1476 584333
Fax: +44 (0)1476 584334

France

10, ZA de la Croix St. Mathieu
28320 Gallardon
France
Tel: +33 (0)2 37 26 09 99
Fax: +33 (0)2 37 26 09 98

Germany

Finienweg 3
28832 Achim/Bremen
Germany
Tel: +49 (0)4202 8852-0
Fax: +49 (0)4202 8852-25

Spain

Gaià 31, Pol. Ind. Plá d'en Coll
08110 Montcada i Reixac
Barcelona
Spain
Tel: +34 93 572 50 90
Fax: +34 93 572 50 91

Scandinavia

Aröds industriväg 34
422 43 Hisings Backa
Sweden
Tel: +46 31 57 51 00
Fax: +46 31 57 51 04

Middle East

Terex Middle East
PO Box 282325, Dubai
U.A.E.
Tel: +971 4 885 8030
Fax: +971 4 885 6364
Email: awp.infome@terex.com

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, WA
USA 98073-9730
Tel: +1 425 881-1800
Fax: +1 425 883-3475

Email: AWP-InfoEurope@terex.com

Distributed By: