

### Specifications

Models	GS-2046		GS-2646		GS-3246	
Measurements	Metric	US	Metric	US	Metric	US
Working height maximum*	8.10 m	26 ft	9.80 m	32 ft 1 in	11.75 m	38 ft
<b>A</b> Platform height maximum w/load sense	6.10 m	20 ft	7.80 m	25 ft 6 in	9.75 m	32 ft
<b>B</b> Platform height stowed	1.04 m	3 ft 5 in	1.16 m	3 ft 10 in	1.29 m	4 ft 3 in
<b>C</b> Platform length - outside	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in
extended	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in
Slide-out platform extension deck	0.91 m	3 ft	0.91 m	3 ft	0.91 m	3 ft
<b>D</b> Platform width - outside	1.15 m	3 ft 10 in	1.15 m	3 ft 10 in	1.15 m	3 ft 10 in
Guardrail height	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in
Toeboard height	0.15 m	6 in	0.15 m	6 in	0.15 m	6 in
<b>E</b> Height - stowed: folding guardrails	2.13 m	7 ft	2.26 m	7 ft 5 in	2.39 m	7 ft 10 in
rails folded	1.55 m	5 ft 1 in	1.68 m	5 ft 6 in	1.80 m	5 ft 11 in
<b>A</b> Length - stowed	2.41 m	7 ft 11 in	2.41 m	7 ft 11 in	2.41 m	7 ft 11 in
extended	3.33 m	10 ft 11 in	3.33 m	10 ft 11 in	3.33 m	10 ft 11 in
<b>G</b> Width	1.17 m	3 ft 10 in	1.17 m	3 ft 10 in	1.17 m	3 ft 10 in
<b>H</b> Wheelbase	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in
<b>I</b> Ground clearance - center	9.5 cm	3.75 in	9.5 cm	3.75 in	9.5 cm	3.75 in
<b>J</b> - with pothole guards deployed	1.9 cm	0.75 in	1.9 cm	0.75 in	1.9 cm	0.75 in

### Productivity

Maximum platform occupancy (indoor/outdoor)	2/2	2/2	2/2	2/2	2/1	2/1
Lift capacity	544 kg	1,200 lbs	454 kg	1,000 lbs	318 kg	700 lbs
Lift capacity - extension deck	113 kg	250 lb	113 kg	250 lb	113 kg	250 lb
Drive speed - stowed	3.2 km/h	2 mph	3.2 km/h	2 mph	3.2 km/h	2 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability - stowed **	30%	30%	30%	30%	25%	25%
Turning radius - inside	zero	zero	zero	zero	zero	zero
Turning radius - outside	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in
Raise / lower speed	30 / 30 sec	30 / 30 sec	30 / 30 sec	30 / 30 sec	57 / 30 sec	57 / 30 sec
Controls	proportional		proportional		proportional	
Drive	dual front wheel		dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel		dual rear wheel	
Tyres - solid non-marking	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in

### Power

Power source	24 V DC (four 6 V 225 Ah batteries)		24 V DC (four 6 V 225 Ah batteries)		24 V DC (four 6 V 225 Ah batteries)	
Hydraulic system capacity	17 L	4.5 gal	17 L	4.5 gal	17 L	4.5 gal

### Sound & Vibration Levels


Sound pressure level (ground workstation)	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA
Sound pressure level (platform workstation)	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA
Vibration	<2.5 m/s <sup>2</sup>	<8 ft 2 in/s <sup>2</sup>	<2.5 m/s <sup>2</sup>	<8 ft 2 in/s <sup>2</sup>	<2.5 m/s <sup>2</sup>	<8 ft 2 in/s <sup>2</sup>

### Weight\*\*\*

	1,974 kg	4,351 lbs	2,447 kg	5,395 lbs	2,812 kg	6,200 lbs
--	----------	-----------	----------	-----------	----------	-----------

### Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280); 2004/108/EC (EMC); 2006/95/EC (LVD)

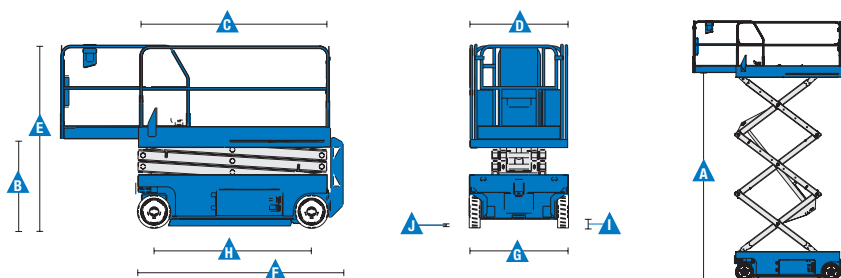

\* The metric equivalent of working height adds 2 m to platform height.  
 \*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.  
 \*\*\* Weight will vary depending on options and/or country standards.