


### Specifications

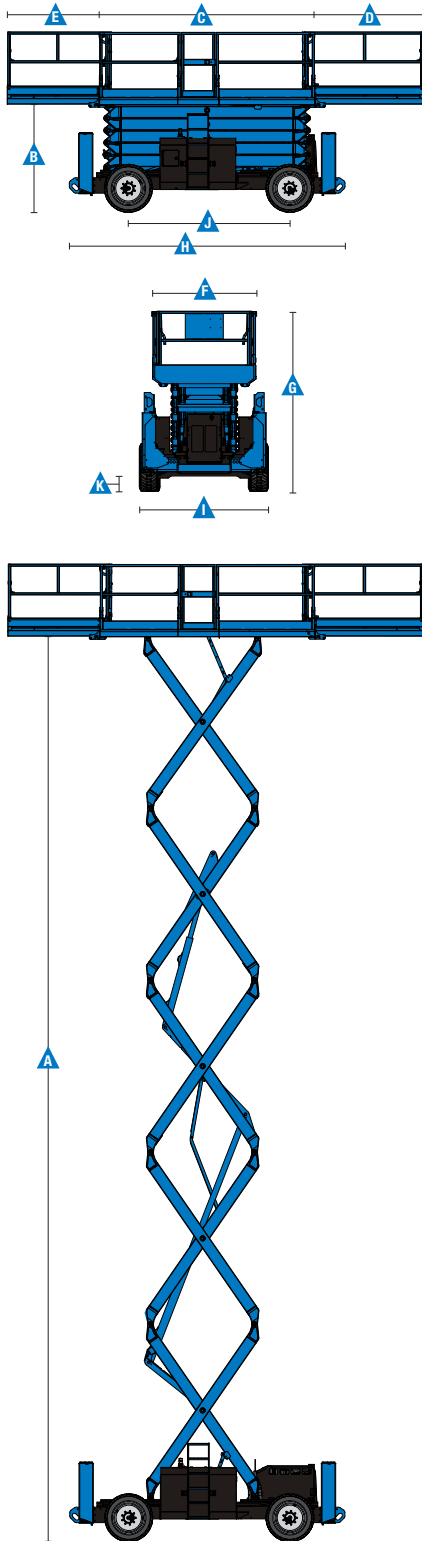

Model	GS-3384 RT	
Measurements	US	Metric
Working height maximum*	39 ft	12.06 m
▲ Platform height maximum	33 ft	10.06 m
▲ Platform height - stowed**	5 ft 1 in	1.55 m
▲ Platform length:		
outside, extended - single deck	13 ft .5 in	3.98 m
outside, extended - dual deck	17 ft 6.25 in	5.34 m
▲ Slide-out platform extension deck - front	5 ft	1.52 m
▲ Slide-out platform extension deck - rear	4 ft	1.22 m
▲ Platform width - outside	6 ft	1.83 m
▲ Height - stowed: folding rails	8 ft 9.5 in	2.68 m
rails lowered	6 ft 6.75 in	2.0 m
▲ Length - stowed: single deck	12 ft 11.25 in	3.94 m
dual deck	13 ft 0.5 in	3.98 m
with outriggers	16 ft	4.88 m
▲ Width: standard tires	7 ft	2.13 m
high flotation tires	7 ft 11 in	2.41 m
▲ Wheelbase	9 ft 4 in	2.84 m
▲ Ground clearance - center	13 in	.33 m

### Productivity

Maximum platform occupancy	7	7
Lift capacity	2,500 lbs	1,134 kg
Lift capacity - extension deck	500 lbs	227 kg
Drive height	full height	
Drive speed - stowed	4.0 mph	6.4 km/h
Drive speed - raised	0.7 mph	1.1 km/h
Gradeability - stowed***	50%	
Maximum outrigger leveling: front to back	7°	
side to side	12°	
Turning radius - inside	10 ft 1.5 in	3.09 m
Turning radius - outside	19 ft 6 in	5.94 m
Raise/lower speed	45/29 sec	
Controls	proportional	
Drive	four wheel	
Tires - foam-filled rough terrain	10 x 31 in	25 x 79 cm

### Power

Power source	Ford MSG-425 4 cylinder gas/LPG 75 hp (56 kW)	
	Deutz D2011L03i 3 cylinder diesel 49 hp (36 kW) air cooled	
Auxiliary Power unit	12 V DC	
Fuel tank capacity	30 gal	113.6 L
Hydraulic system capacity	30 gal	113.6 L

### Weight\*\*\*\*

	11,825 lbs	5,364 kg
with outriggers	13,500 lbs	6,124 kg

### Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* Based on RT tires. Deduct 2 in (5.8 cm) for turf and non-marking.

\*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

\*\*\*\* Weight will vary depending on options and/or country standards.